

NEW


# Power-Assisted Hand Pallet truck

## Easy and Smooth Operation

The unit smartly assist the moving by pulling with light force




## Compact integrated unit, it can retrofit.

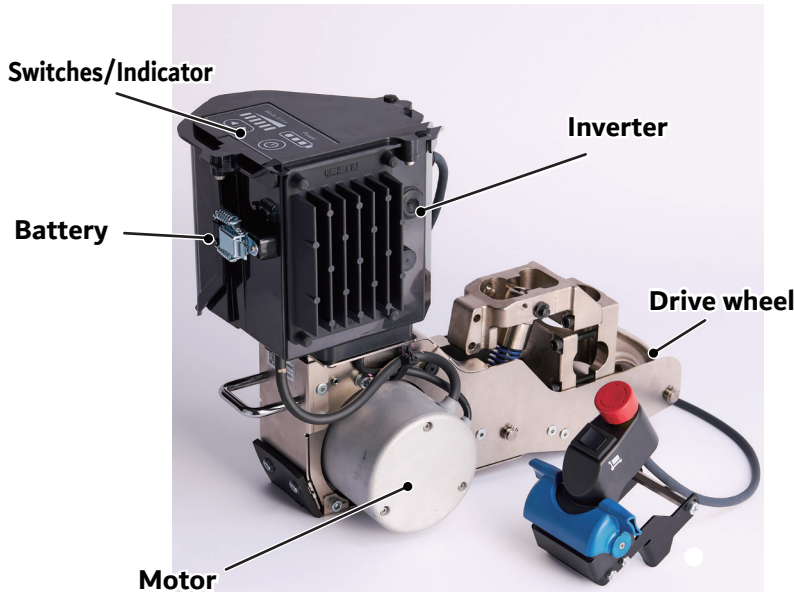


### Removable Small Battery

When runs out the battery, just replace new battery to use continuously.



### Assist Power Adjustment Remaining Battery Capacity

Easy operation with buttons.



### Can be Retrofitted

Attached with bolts.





### Assisted Starting to Move

Smooth Start



### Assisted Stopping

Mildly Stop



### When Battery Runs Out

Movable without the Assist


#### Specifications for Assist Unit

	Capacity (kg)	Assist Power	Size(mm)			Work Environment Temperature (°C)	Power Output (W)	Max. Driving Speed (km/h)	Drive Wheel φ*Width (mm)	Battery	Voltage (V)	Charging Method	Charging Time (h)	Net Weight (kg)
			Length	Width	Height									
EDT-250	1000	2/3	450	220	350	0-40	250	5	Urethane 50*30	Lithium Ion	24	Dedicated Charger AC100-240V 50-60Hz 1.15-0.63A	approx. 2	10
	1500	1/2												


#### Specifications for Standard Types

	Capacity (kg)	Min. H (mm)	Max. H (mm)	Fork(mm)					Overall Length (mm)	Overall Height (mm)	Steering Wheel φ*Width (mm)	Load Wheel φ*Width (mm)	Net Weight (kg)		
				Outer Width	Length			Inner Width							
					H1	H2	W1							L1	L2
EDT-15M-85	1,500	80	200	470	850	730	570	170	1,460	1,235	Stereo Rubber 180*60	Urethane 80*73	72		
EDT-15S-85					980	860	700						220	1,590	82
EDT-15S-98					1,070	950	790							1,680	83
EDT-15S-107				1,150	1,030	870	320	1,760					84		
EDT-15S-115				980	860	700		1,590					85		
EDT-15J-98				1,070	950	790	385	1,680					84		
EDT-15J-107				1,150	1,030	870		1,760					85		
EDT-15L-85				850	730	570	385	1,460					86		
EDT-15L-107				1,070	950	790		1,680					90		
EDT-15L-122				1,220	1,100	940		1,830					93		
EDT-15L-140				1,400	1,280	1,120		2,010					103		


■ Assist Power Conceptual Diagram

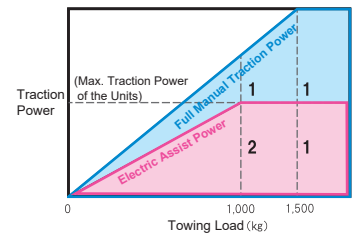

■ Dimensions (Standard Types)

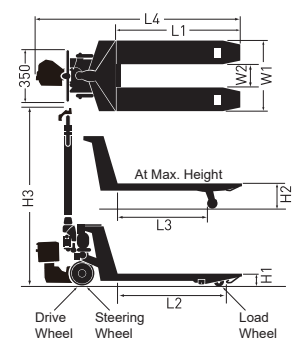

■ Dimensions (TCP Types)

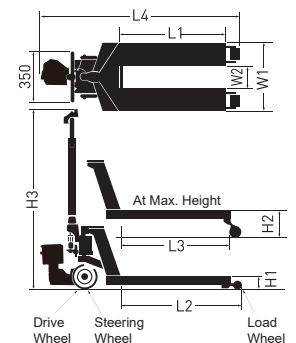

#### Specifications for Low-profile Types

EDT-15M-85H	1,500	65	185	470	850	720	570	170	1,460	1,235	Stereo Rubber 180*60	Urethane 65*73	72		
EDT-15S-85H					980	860	700						220	1,590	82
EDT-15S-107H					1,070	950	790							1,680	84
EDT-15S-115H				1,150	1,020	870	320	1,760					85		
EDT-15J-107H				980	860	700		1,590					85		
EDT-15L-107H				1,070	950	790	385	1,680					90		
EDT-15L-122H				1,220	1,090	940		1,830					93		
EDT-15L-140H				1,400	1,270	1,120		2,010					103		

#### Specifications for Beer Pallet Types

EDT-15J-98H	1,500	65	185	620	980	850	700	320	1,590	1,235	Stereo Rubber 180*60	Urethane 65*73	78
-------------	-------	----	-----	-----	-----	-----	-----	-----	-------	-------	----------------------	----------------	----

#### Specifications for TCP Types

EDTT-15S-114	1,500	80	180	520	1,140	1,245	1,125	220	1,860	1,235	Stereo Rubber 180*60	Urethane 80*73	83
EDTT-15L-114				685				385					89

#### Specifications for Low-noise Types

EDT-15S-107T	1,500	80	200	520	1,070	950	790	220	1,680	1,235	Stereo Rubber 180*60	White Urethane 80*73	84
EDT-15J-107T				620				320					85
EDT-15L-122T				685				385					93



**Originality Produces Know-how**  
**OKUDAYA GIKEN CO., LTD.**

263 Tanjo, Mihara ku, Sakai city, Osaka 587-0011, JAPAN.  
 TEL : 81-723-61-7861 FAX : 81-723-62-2102  
 URL : <http://www.opk.co.jp>

\* Products with special specifications besides those with standard specification are manufactured as well. Feel free to contact OKUDAYA GIKEN.  
 The specifications described in this catalog are subject to change without notice for product improvement.  
 \* The colors of actual products may be more or less different from those printed in this catalog.

All rights reserved.